
Installation Instructions



7-Day Digital Timer Model 1529

Feel the drive

Mounting Instructions:

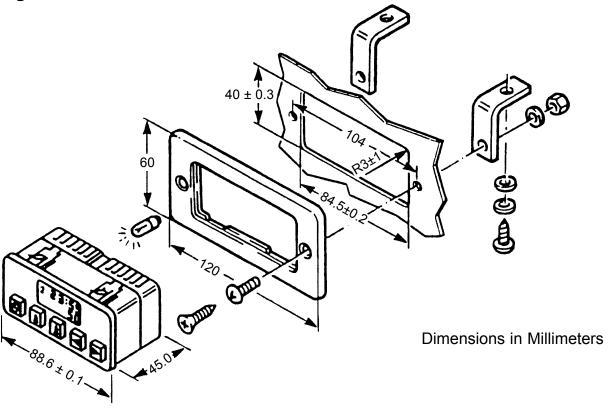

Dashboard thickness min: 1.5 mm

max: 3.0 mm

The timer can be mounted directly in the dashboard.

Dashboard thickness over 3.0 mm:

The timer must be mounted with the Webasto Mounting Frame # 474630

Part Numbers for Individual Components:

7-Day Triple Program Digital Timer Model 1529 12-Volt 5010038A
7-Day Triple Program Digital Timer Model 1529 24-Volt 82775A
Adapter Harness 905778

Part Numbers for Timer Kits - includes Adapter Harness:

7-Day Triple Program Digital Timer Model 1529 12-Volt 905770 7-Day Triple Program Digital Timer Model 1529 24-Volt 905774

For questions concerning these installation instructions or products detailed on this sheet, call: 1-800-555-4518 USA 1-800-667-8900 Canada

Rev. 10/00 907605 www.webasto.us Page 1


Installation Instructions

~ebast

7-Day Digital Timer Model 1529

Feel the drive

Terminal Connections - Timer

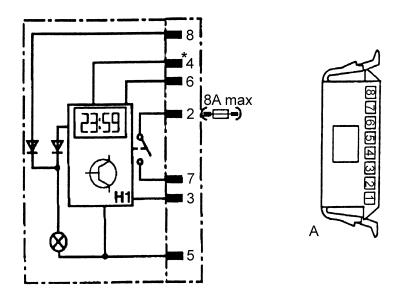

A-Plug

- (8) Dashlight (optional)
- (*4) Battery positive or ignition
- Battery positive
- (2) Battery positive
- (7) ON/OFF signal to heater
- (3) Operation/Fault Indicator light positive
- Ground (5)

A-Plug: AMP NO. 929 594-1

Webasto 24984A

AMP No. 925 596-6 Terminal:

Webasto 497037

Recommended option for Coaches, Transit and Schoolbuses:

Connect pin *4 or C-Plug of adapter harness to ignition signal from vehicle.

Switching heater ON for instant heater operation with pin 4 connected to ignition. (Motorcoach, Transit and School bus applications)

With ignition ON:

Press flame button.

Heater is switched ON and continues to operate until the flame button is pressed again or ignition is switched OFF.

With ignition OFF:

Press flame button.

Heater is switched ON for the preset operating time.

NOTE: If the ignition is switched off while the heater is in operation, the remaining operating time of 5 minutes flashes on the display and the heater continues to operate for this period of time.

For questions concerning these installation instructions or products detailed on this sheet, call: 1-800-555-4518 USA

1-800-667-8900 Canada

Rev. 10/00 907605 Page 2 www.webasto.us


Installation Instructions



7-Day Digital Timer Model 1529

Feel the drive

Adapter Harness Configured for Motorcoach, Transit and School Bus Applications

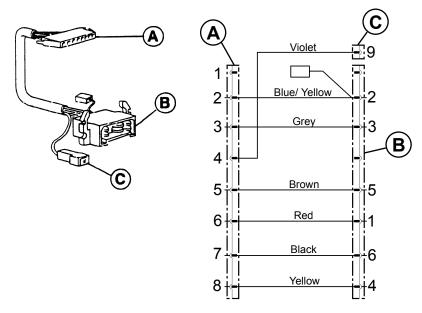


C-Plua

(9) Ignition Signal from Vehicle

B-Plug

- (2) 7.5 AMP Fuse: Battery positive
- (3) Operation/Fault Indicator Light positive
- (5) Ground
- (1) Battery positive
- (6) ON/OFF Signal to Heater
- (4) Dash Light (optional)

Adapter Harness Configured for Truck Installations

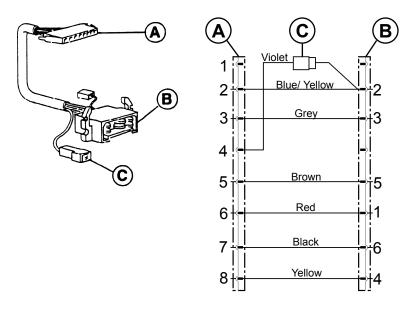

B-Plug

- (2) 7.5 AMP Fuse: Battery positive
- (3) Operation/Fault Indicator Light positive
- (5) Ground
- (1) Battery positive
- (6) ON/OFF Signal to Heater
- (4) Dash Light (optional)

Operation in Truck Mode:

Rev. 10/00 907605

Press Flame button

Heater is switched ON (continues operation) and continues to operate until flame button is pressed again switching heater OFF.

For questions concerning these installation instructions or products detailed on this sheet, call:

1-800-555-4518 USA

1-800-667-8900 Canada